

VX 7502 3D

for rebated and unrebated doors with casing frames



Product features

- for rebated and unrebated doors
- for casing frames
- for heavy-duty hinges VARIANT VN and VARIANT VXG
- continuous 3D adjustment (side +/- 3,0 mm, height +/- 3,0 mm, compression +/- 3,0 mm)

Technical details



Attributes	Value
Load capacity	200.0 kg
Cutter diameter	24.0 mm
Collar ring diameter	30.0 mm

Note

The load capacity mentioned above refers to two hinges per door leaf (1 x 2 m). Also the load capacities of the respective combined receiver have to be taken into consideration. For detailed information please look at the chapter "technical information".

Delivery includes packers for casing thicknesses of 22-28 mm.

Cover angle/plate form a unit together with the receiver. They have to be ordered separately.

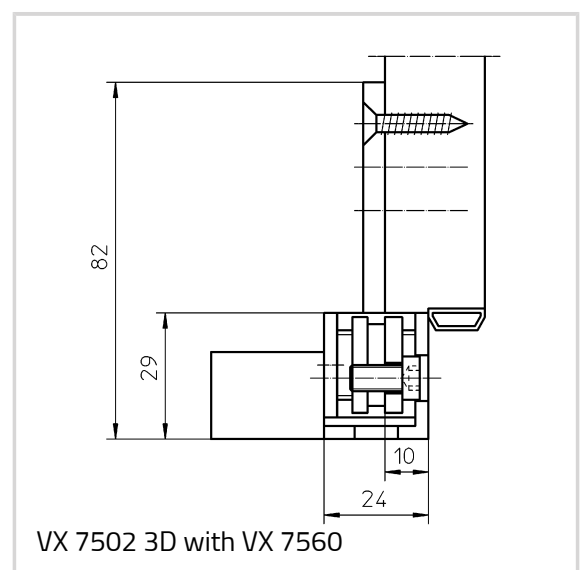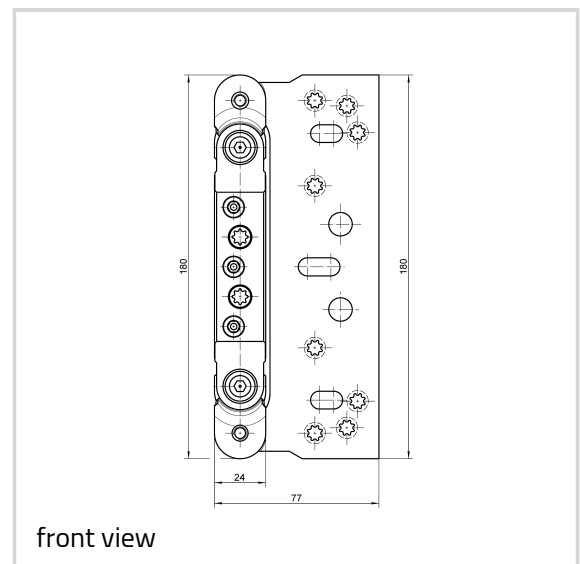

VARIANT VX - VX 7502 3D


In order to obtain the maximum load capacity, a sufficient fixing of frame and fixing plate/receiver in the masonry resp. partition wall frame is imperative.

Suitable for

Universal milling frame
Template 5 250568 5

Combinations

VX 7939/100
VX 7939/100 FD
VX 7939/120
VX 7939/160 Planum
VX 7939/160 FD Planum
VX 7939/160 18-3
VX 7939/160 18-3 FD
VX 7939/160
VX 7939/160 FD
VX 7939/160 S
VX 7939/160 FD S
VX 7939/160 S WK MSTs
VX 7939/160 FD S WK MSTs
VX 7099 Finger Protection
VX 7728/100
VX 7728/120
VX 7728/160
VX 7720/100
VX 7729/100
VX 7729/120
VX 7729/160 Planum
VX 7729/160 18-3
VX 7729/160
VX 7560 KK
VX 7560 RK
VX 7560 KR
VX 7560 RR
VX 7580
VXG 7990/100
VXG 7990/100 K
VXG 7990/120
VXG 7990/120 K
VXG 7780/100
VXG 7780/100 K
VXG 7780/120
VXG 7780/120 K
V 7900 WF VX-1

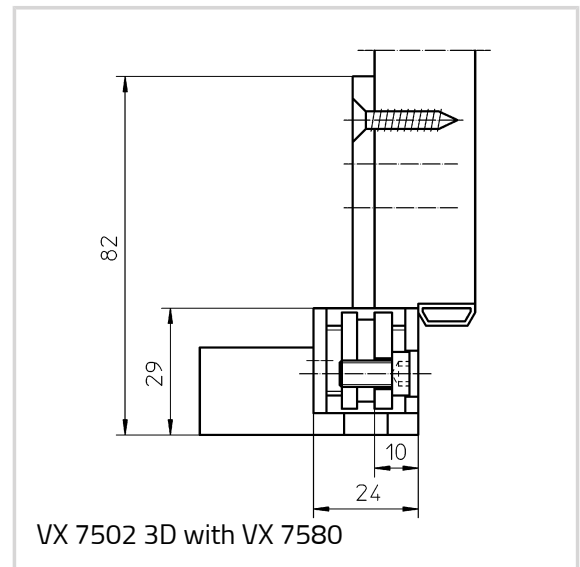

VARIANT VX - VX 7502 3D**Item**

Finish(es)	blue galvanized (010)
OF-NR.	010
VPE	Pack of 10
DIN	DIN right and left hand
Item No.	5 071204 0 01006
EAN	4015471068509